


LEO Energy Lithium ION battery solutions consist of high energy density lithium ion batteries integrated with PCM protection circuitry to give our users extreme play time with their host devices.

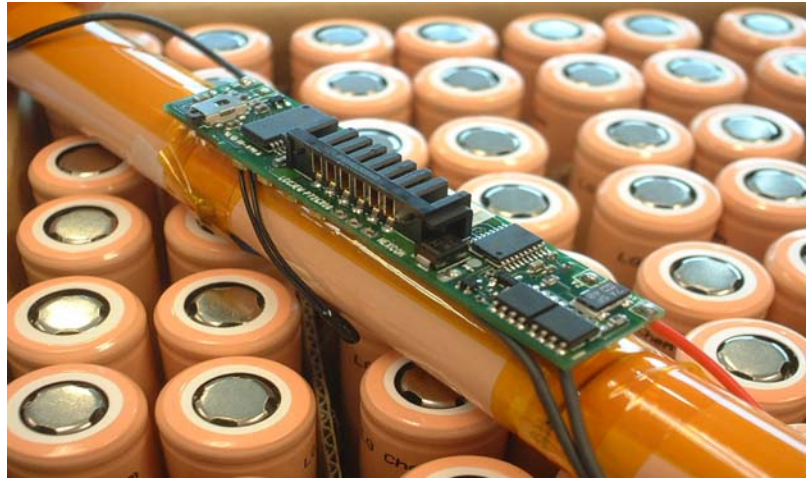

	Capacity (mAh)	V	Cycle	Temp	Weight (g)	Dimension (mm)
<b>CYLINDRICAL</b>						
18650W4	2400	3.7	500	-20 – 60degC	44.5	Ø18 * 65
18650W3	2200				44	Ø18 * 65
18650W2	2000				44	Ø18 * 65
18650W1	1800				44	Ø18 * 65
18500	1250				30	Ø15 * 50
17670	1420				38	Ø17 * 67
17650	1400				36	Ø17 * 65
17500	950				28	Ø17 * 50
14500	620				20	Ø14 * 50
14430	500				17	Ø14 * 43
<b>PRISMATICS</b>						
103463	1750	3.7	500	-20 – 60degC	57	10.2 * 34 * 63
103450	1600				44	10.2 * 34 * 50
103448	1550				42	10.2 * 34 * 48
083465	1400				48	7.9 * 34 * 65
083448	1050				34	7.9 * 34 * 48
063465	1200				40	6.2 * 34 * 65
063450	950				32	6.2 * 34 * 50
063448	850				24	6.3 * 34 * 48
063048	750				24	6.3 * 30 * 48
053048	720				21	5.3 * 30 * 48
043450	720				18	4.2 * 34 * 50
043048	600				17	4.2 * 30 * 48